

SMA Female to SMB Female Adaptor (SMA Jack to SMB Jack ADT.)


P.N. : B18-A2204-34

Products feature

- Reliable V.S.W.R
- Wide broadband frequency application
- SMB Female can be assembled with FAKRA Connector

Electrical specification

Item	Specification
Frequency Range(GHz)	DC ~ 4 GHz
Impedance (Nominal)	50Ω
V.S.W.R (Max)	1.30 : 1
Insertion Loss (Max)	0.2 dB
Connector Type	SMA female - SMB female (Body-male, Pin-female)
RoHS	Compliance

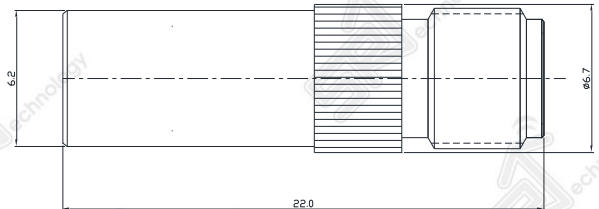

Material specification

Item	Specification
Body	Brass / Gold plating
Center Contact (pin)	Beryllium Copper/ Gold plating
Insulator	PTFE

